


Glydea® Motor

Drapery Motorization

With one track, two motor options and various control modules, Glydea® offers a wide range of options for any project requirement.

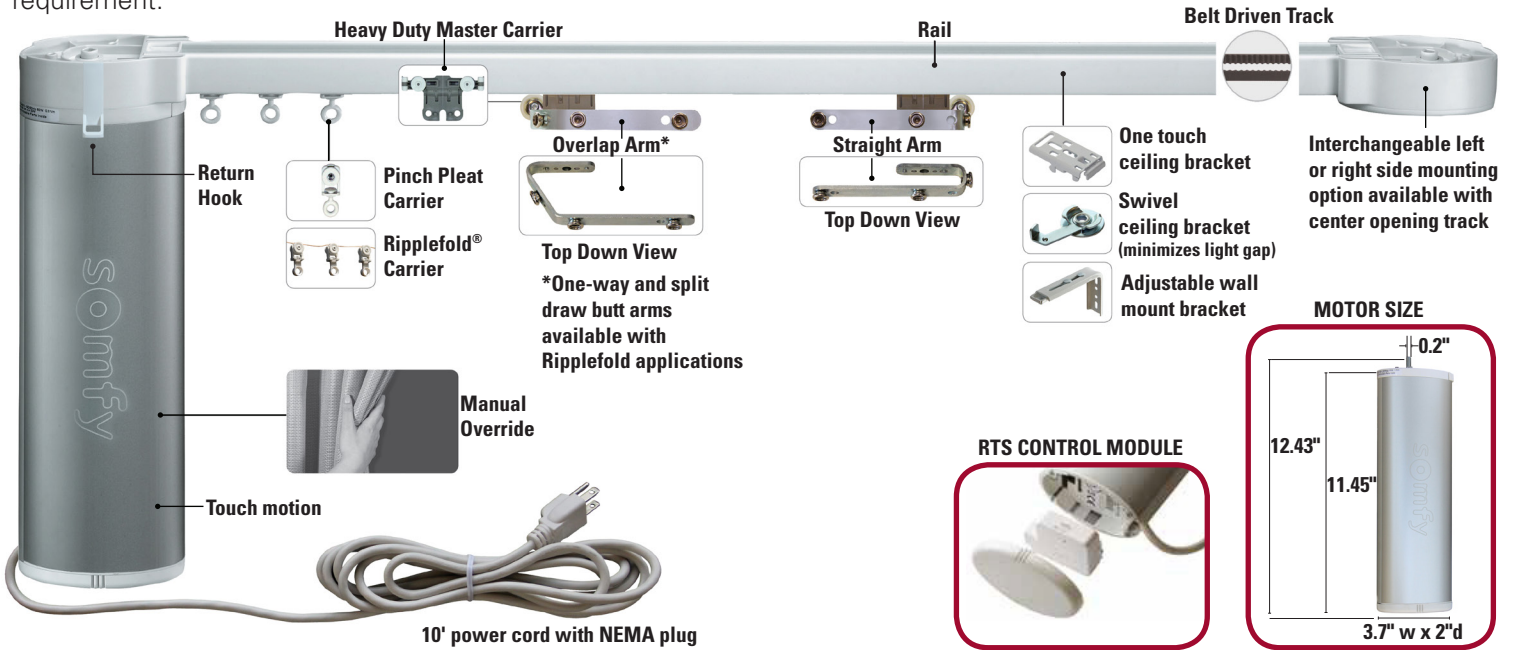

FEATURES

- Control options include (but are not limited to) RTS, Dry Contact and Standard 4 wire switch
- Patented control module cover conceals unsightly cables and protects the connectors and control modules inside the motor
- Easily integrates with third party control protocols
- Touch motion allows user to activate the motor by pulling on the fabric/baton, two sensitivity settings available
- Manual override disengages the motor when drapery is adjusted manually
- Soft start and soft stop
- Automatic or adjustable limit setting
- Adjustable speed available
- Patented flexible master carrier reduces friction and is adaptable to various drapery types including Pinch Pleat and Ripplefold®
- Openings available: Side, center, asymmetrical and multiple
- Custom bends and curves available
- Improved arm design provides even overlap and even stack back.
- Advanced track design for multiple bracket options including ceiling swivel, ceiling spring loaded one touch, or single/dual track adjustable wall bracket

SPECIFICATIONS

	Glydea 35e	Glydea 60e
Power Supply	110 V AC	
Amperage	0.5 A	1 A
Average Linear Speed	Adjustable – 4.9"–7.86" per second	
Power Consumption	60 W	120 W
Power Cable Type	3-wire cable with molded NEMA plug 4-wire cable (wired version only)	
Dry Contact Control Connector Type	RJ12	
DCT Control Circuit Voltage	3.3V DC	
Motor Sound Level	< 44 dBA	
Certifications	cTUV us, CCC, CE	
Track Maximum Length	32 ft	36 ft
Maximum Number of Splices	2	
Maximum Bending Radius	11.8 in	
Minimum Curving Radius	118 in	
Max Traversing Weight	77 lbs	132 lbs

Glydea® is a registered trademark of Somfy. Ripplefold® is a registered trademark of Kirsch.