Classic Roman Shade
Manual Installation

TOOLS NEEDED

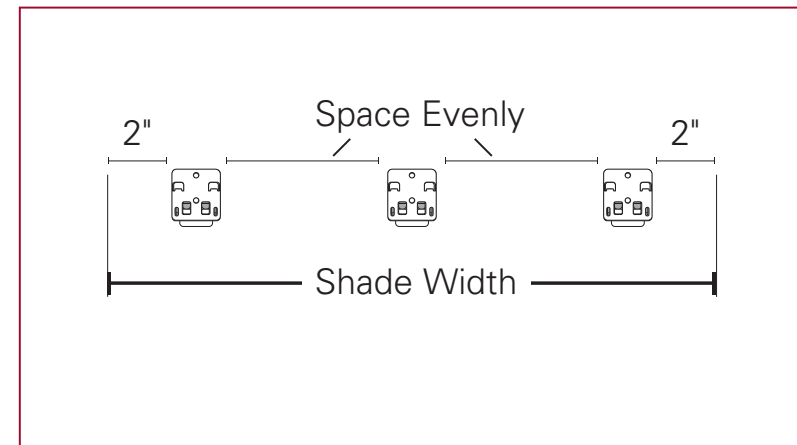| Pencil | Measuring Tape | Level | Drill with bits | Screwdriver |
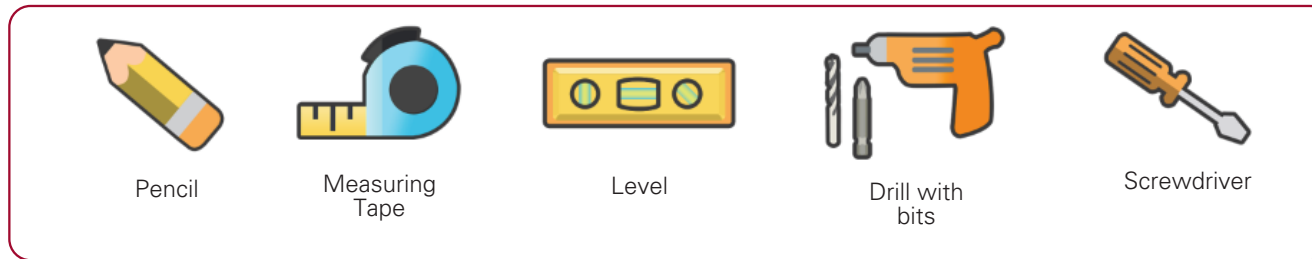
INSTALLING THE BRACKETS

CEILING AND WALL BRACKETS

Ceiling

Wall Bracket Arm

Ceiling Bracket Front Teeth

Ceiling Bracket Back Teeth

Wall

BRACKET SPACING

2" Space Evenly 2"
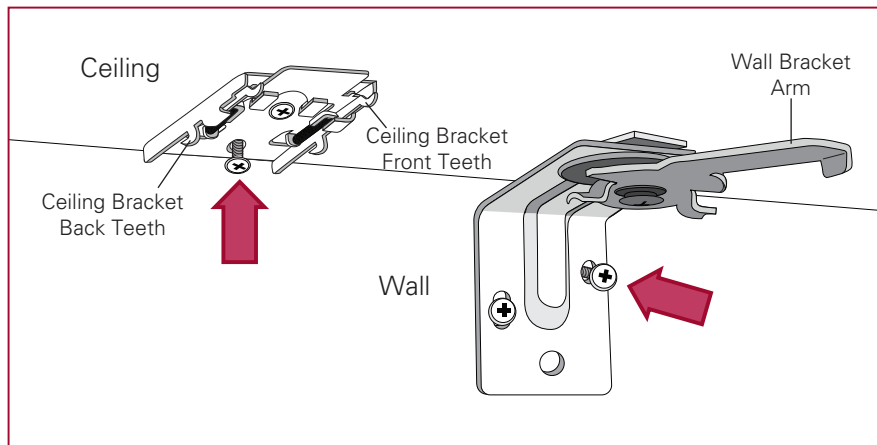
Shade Width

Mount into wood or metal studs or into concrete with concrete anchors. Drywall anchors are not recommended.

Determine the mounting location. Place the brackets 2" in from the width of the shade on both sides. If more than two installation brackets came with your order, space additional bracket(s) evenly between the two end brackets.
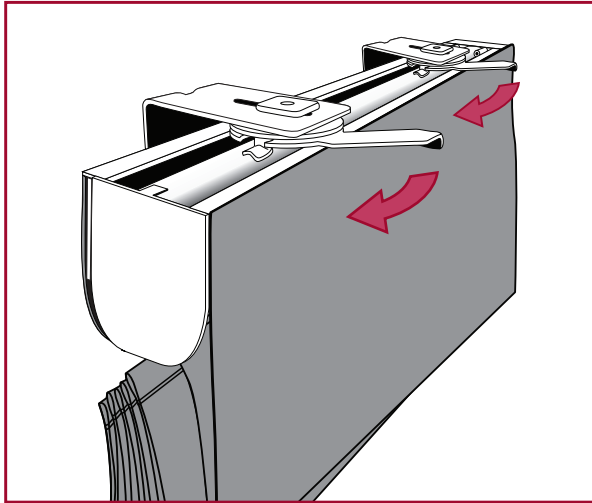
Mount brackets with the screws provided. Pre-drilling is recommended. Check that the brackets are level and aligned.

HunterDouglas
Hospitality

Classic Roman Shade
Manual Installation

WALL BRACKET SHADE INSTALLATION

OPEN BRACKETS

Make sure all the brackets are in the open position.

Place the headrail flush below the brackets and push the arm of the each bracket into the locked position.
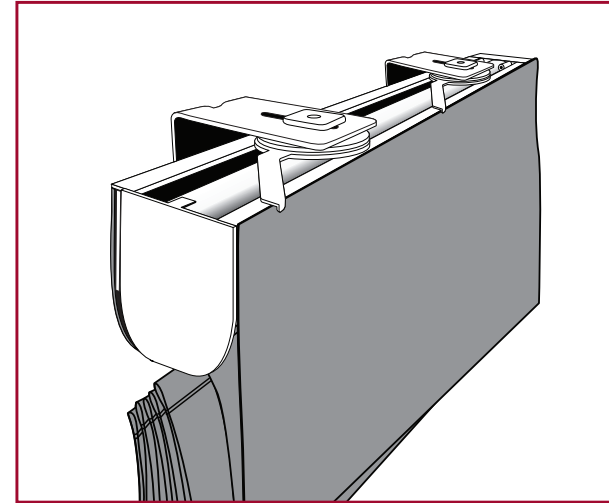
Make sure the bracket catches under the ridges of the headrail.
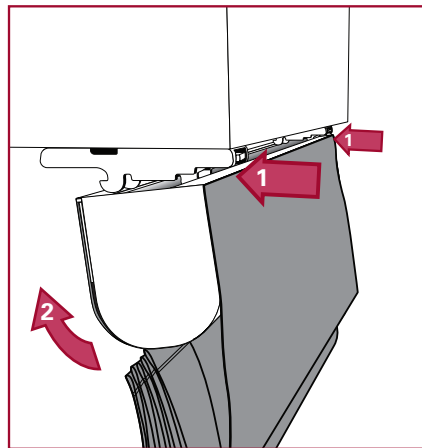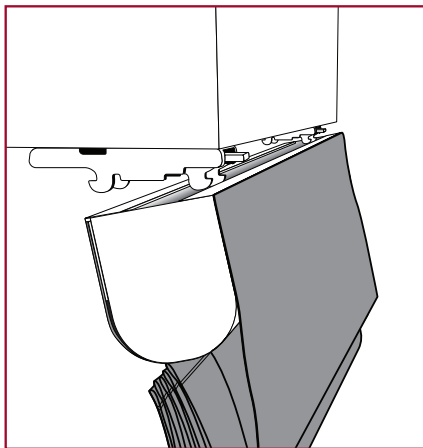
REMOVING ROMAN SHADE

Securely hold the headrail. Push the arm of the brackets back to the unlocked position. Use a flathead screwdriver between the arm and the top of the shade if necessary.

Remove the shade from the brackets.
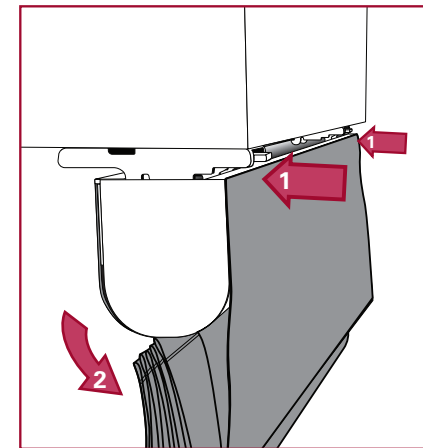
LOCKED BRACKETS

CEILING BRACKET SHADE INSTALLATION

Angle the shade so that the front ridge of the headrail can rest on the front teeth of the bracket.

Push the headrail towards the back of the brackets and lift the back of the shade until the headrail catches on the back teeth of the brackets.

REMOVING ROMAN SHADE

Securely hold the headrail. Push the headrail towards the back of the shade and tilt the back of the shade down until the headrail releases from the back teeth of the bracket. Move the headrail towards the front of the shade to remove completely from the brackets.

HunterDouglas
Hospitality