


Glydea® ULTRA Motor

Drapery Motorization

One of the quietest motorization solutions on the market. With one track, two motor options and various control modules, Glydea® ULTRA offers a wide range of options for any project requirement.

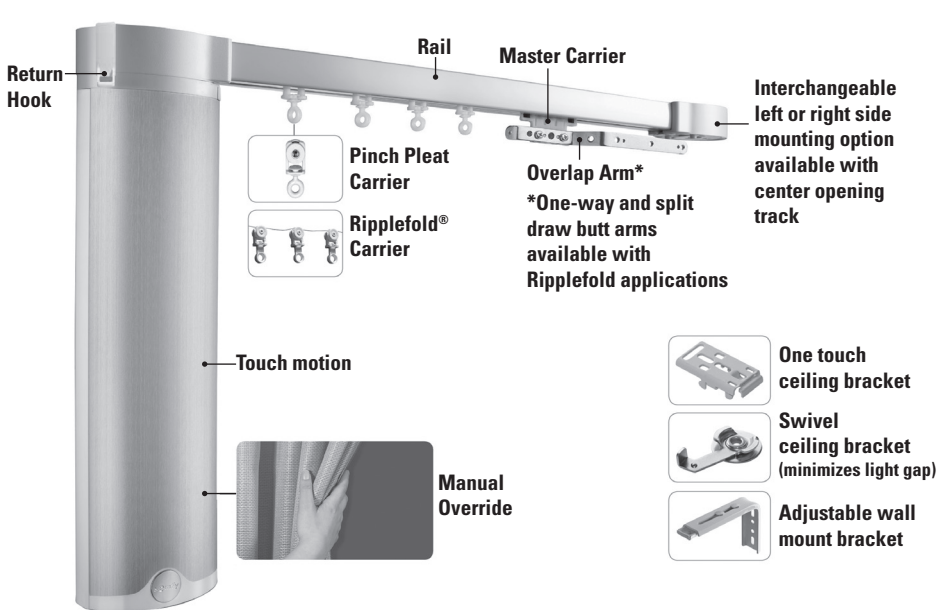

MOTOR BOTTOM WITHOUT COVER



MOTOR BOTTOM COVER



Motors are available as RTS, DCT or wired (Standard). DCT and wired motors cannot be upgraded to RTS.

MOTOR SIZE



FEATURES

- Control options include (but are not limited to) RTS (myLink™ with app or voice control), Dry Contact and Standard 4 wire switch
- Bottom cover plate includes two punch-out options for CAT5 cables for DCT or RS485, protecting the connectors and control modules inside the motor
- Easily integrates with third-party control protocols
- Touch motion allows user to activate the motor by pulling on the fabric/baton, two sensitivity settings available
- Manual override disengages the motor when drapery is adjusted manually
- Switch on bottom of motor to select Silent vs. High Speed mode
- Soft start and soft stop
- Automatic or adjustable limit setting
- Adjustable speed available
- Patented flexible master carrier reduces friction and is adaptable to various drapery types including Pinch Pleat and Ripplefold®
- Openings available: Side, center, asymmetrical and multiple
- Custom bends and curves available
- Improved arm design provides even overlap and even stack back
- Advanced track design for multiple bracket options including ceiling swivel, ceiling spring loaded one touch, or single/dual track adjustable wall bracket

SPECIFICATIONS

Glydea 35e Glydea 60e

Power Supply	120V AC 50/60 HZ	
Amperage	0.5 A	1 A
Average Linear Speed	Adjustable – 4.9"–7.86" per/sec Silent – 2.95" per/sec	
Power Consumption	60 W	120 W
Power Cable Type	3-wire cable with molded NEMA plug 4-wire cable (wired version only)	
Power Cable Length	10 ft	
Dry Contact Control Connector Type	RJ12	
DCT Control Circuit Voltage	3.3V DC	
Motor Sound Level	38 dBA (in silent mode)	
Certifications	cTUV us, CE	
Track Maximum Length	32 ft	36 ft
Maximum Number of Splices	2	
Minimum Bending Radius	11.8 in	
Minimum Curving Radius	118 in	
Max Traversing Weight	77 lbs	132 lbs

Glydea® is a registered trademark of Somfy. Ripplefold® is a registered trademark of Kirsch.