

RB 500™ 5.875" Dual Bracket - Sonesse 30 WireFree RTS Motor

Diagram

Series 5-216

SPECIFICATIONS

To properly conceal the brackets, the shade must be mounted inside a window frame or in a pocket.

Bracket Mount: **Ceiling, Wall, or End Mount**

Tube Size: **37mm (1.5")**

Shade Width: **30" - 80"**

Shade Weight: **11 lbs**

Light Gap: **Motor End — 3/4" (.75")**

Idle End — 3/4" (.75")

Motor connection: **Built-in Rechargeable Battery**

Power connector: **10" Motor Charging Cable Plug**

Bracket Color: **Grey**

Bracket Covers: **n/a**

Hembar: **Shade fabric determines which hembar is available**

Control Options: **Wireless Wall Switch, Wireless Remote,**



Universal Interface, Timer, Sun Sensor

mylink™ RTS Smartphone, Tablet

and Amazon Alexa Interface

Bracket	Dimensions	Max Roll Up
Dual	5.875"H x 1"W x 5.875"D	2-1/2" (2.5")

Note: 6" depth minimum is needed to conceal brackets

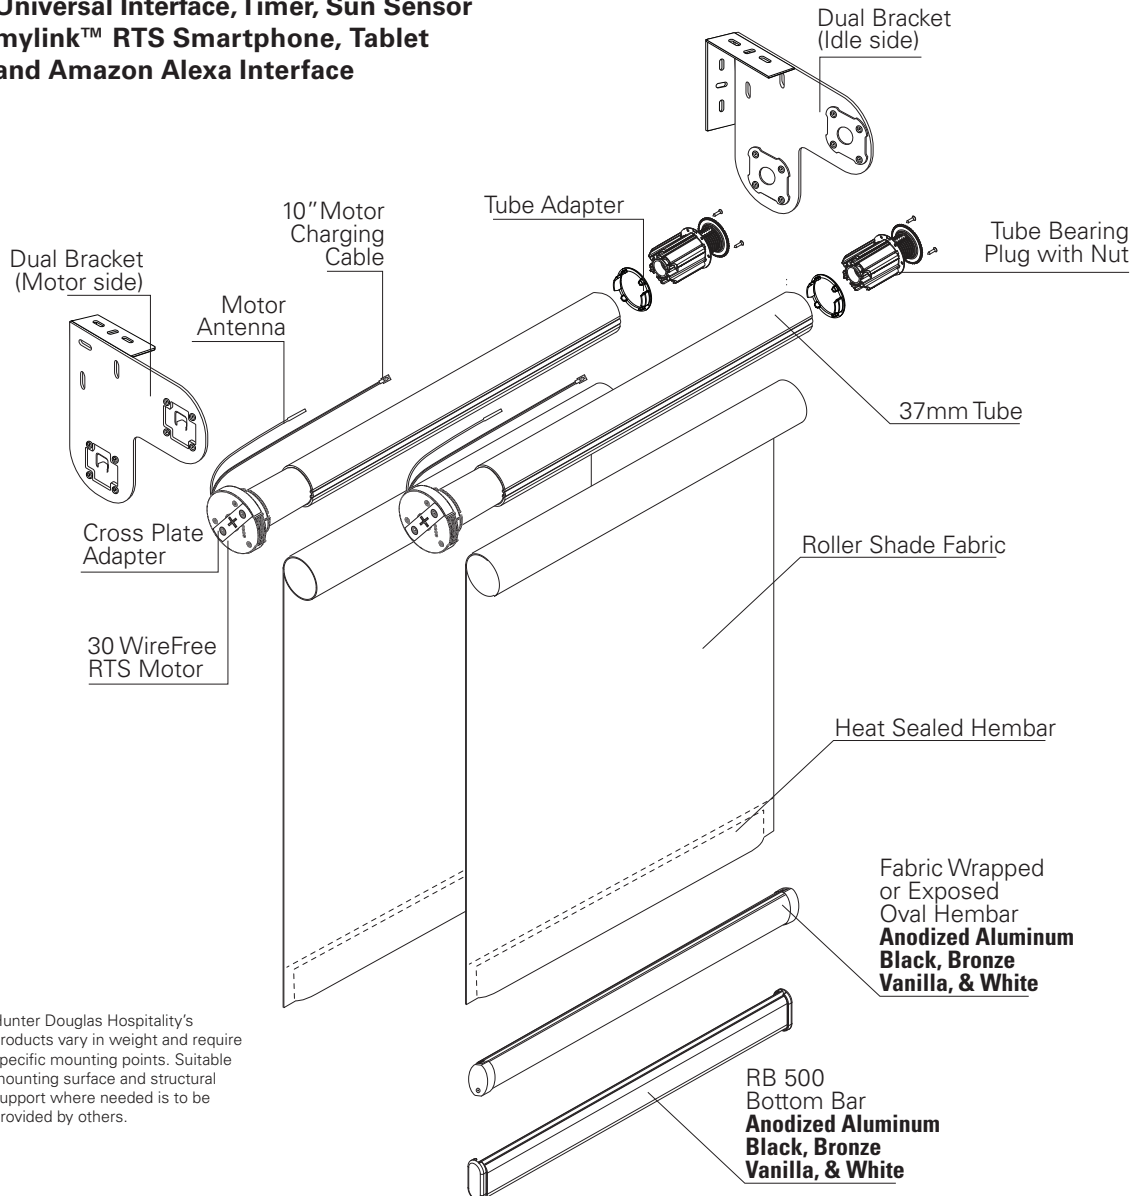


Hunter Douglas Hospitality's products vary in weight and require specific mounting points. Suitable mounting surface and structural support where needed is to be provided by others.


Las Vegas • Chicago
800.229.5300
HDhospitality.com

© 2018 Hunter Douglas. All rights reserved. All trademarks used herein are the property of Hunter Douglas or their respective owners.

OPTIONS



Integrated Leveler



Side Channels

Plug-In Charger

