

RB 500™ 7" Dual Bracket - Sonesse 40 & Sonesse 50 RTS Motors

Diagram

Series 5-269

SPECIFICATIONS

Mount: **Ceiling, Wall, or End Mount**
 Tube Size: **50mm (2") and 62mm (2.5")**

Shade Width: **Over 80"**

Light Gap: **Motor End — 1"**

Idle End — 7/8" (.875")


Hembar: **Shade fabric determines which hembar is available**

Control Options: **Wireless Wall Switch, Wireless Remote, Universal Interface, Timer, Sun Sensor**

mylink™ RTS Smartphone, Tablet and Amazon Alexa Interface

Bracket	Dimensions	Max Roll Up
7" Dual	7.5 H x 1.625" W x 5.875" D	3-1/2" (3.5")


Note: 6" depth minimum is needed to conceal brackets



BRACKET & BRACKET COVER COLORS



White



Vanilla




Aluminum



Bronze




Black

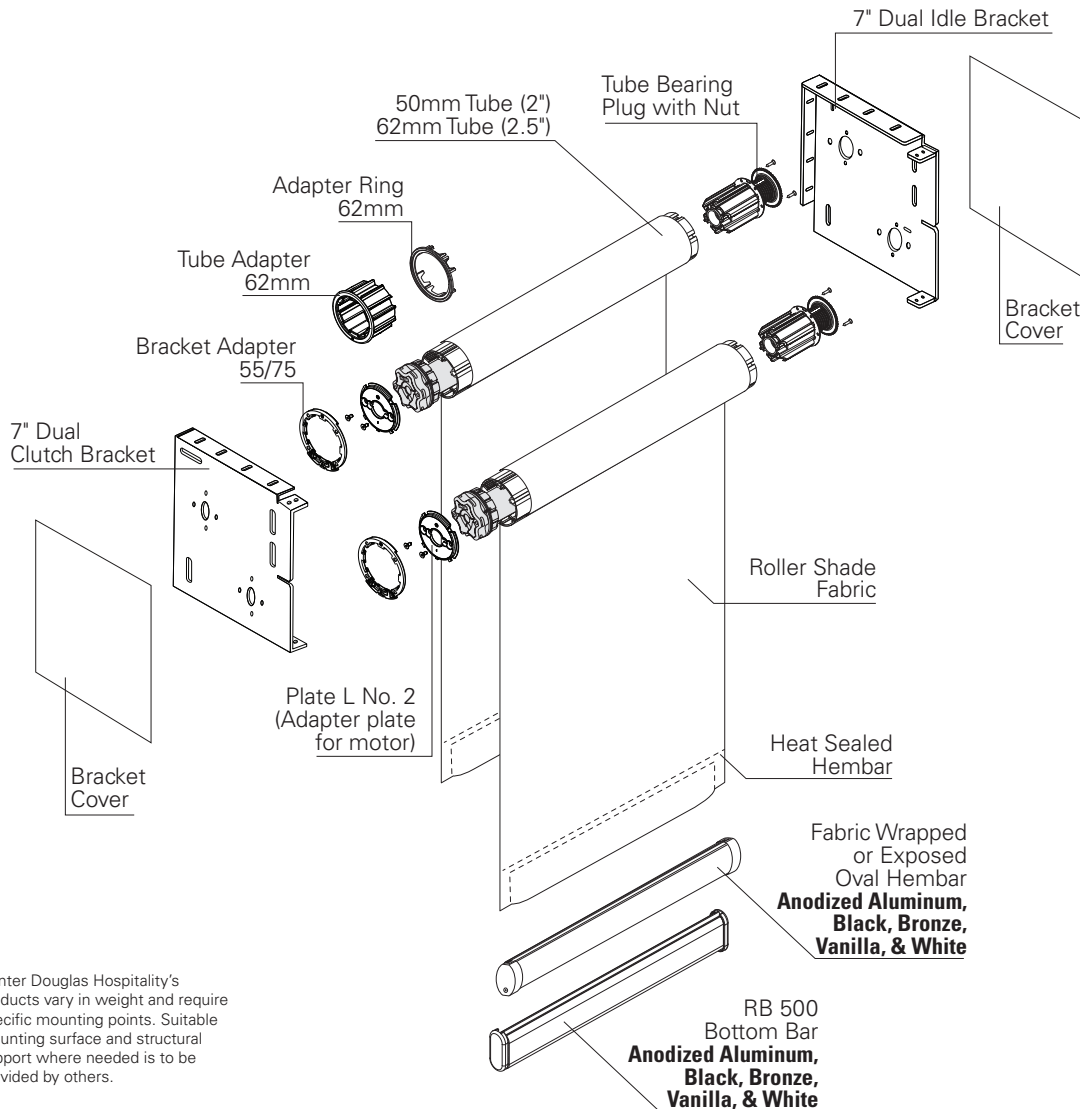


Hunter Douglas Hospitality's products vary in weight and require specific mounting points. Suitable mounting surface and structural support where needed is to be provided by others.


OPTIONS




Power Options



Side and Middle Channel



Integrated Leveler



9" Pocket (available in White and Aluminum only)

Las Vegas • Chicago
 800.229.5300
 HDhospitality.com

© 2018 Hunter Douglas. All rights reserved. All trademarks used herein are the property of Hunter Douglas or their respective owners.

HunterDouglas
 Hospitality