RB 500™ 9" Dual Pocket - Sonesse 40 & Sonesse 50 RTS Motors

Diagram

SPECIFICATIONS

Mount: Surface and Ceiling Mount Tube Size: 50mm (2") and 62mm (2.5")

Shade Width: Over 80"

Motor Options: RTS 409, RTS 506 & RTS 510

Light Gap: Motor End −1"

Idle End -7/8" (.875")

Hembar: Shade fabric determines

which hembar is available Control Options: Wireless Wall Switch,

Wireless Remote, Universal Interface,

Timer, Sun Sensor

mylink™ RTS Smartphone, Tablet and Amazon Alexa Interface


7 Juli 2 Juli 2 Juli 7		,- (6.6)	⊣ ⊦
7" Dual Bracket	9" H x 9" D	3-1/2" (3.5")	
Bracket	Pocket Dimensions	Max Roll Up	


D Surface Н **Pocket**

POCKET COLORS




CLOSURE OPTIONS




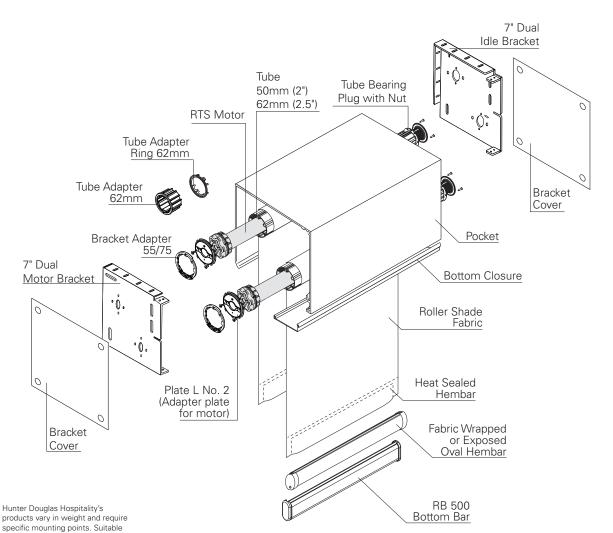


OPTIONS



Motor Power Options



Integrated Leveler



Side and Middle Channel

Las Vegas • Chicago 800.229.5300 HDhospitality.com

mounting surface and structural support where needed is to be provided by others.

