

RB 500™ Coupled Blockout System - Sonesse 40 & Sonesse 50 RTS Motors


Diagram

SPECIFICATIONS


Mount: **Ceiling, Wall, or End Mount**
 Tube Size: **50mm (2") and 62mm (2.5")**
 Minimum Shade Width RTS 40: **28"**
 Minimum Shade Width RTS 50: **35"**
 Light Gap: **Clutch End — 1"**
 Middle — 1-1/2" (1.5")
 Idle End — 7/8" (.875")

Bracket Color: **Grey**
 Bracket Cover Colors: **Black, Grey, & White**
 Control Options:
Wireless Wall Switch, Wireless Remote,
Universal Interface, Timer, Sun Sensor,
mylink™ RTS Smartphone, Tablet,
and Amazon Alexa Interface

Bracket	Dimensions	Max Roll Up
4" Fascia	4" H x 1" W x 4" D	3-3/4" (3.75")




FASCIA, SIDE AND MIDDLE CHANNELS, & BOTTOM BAR COLORS

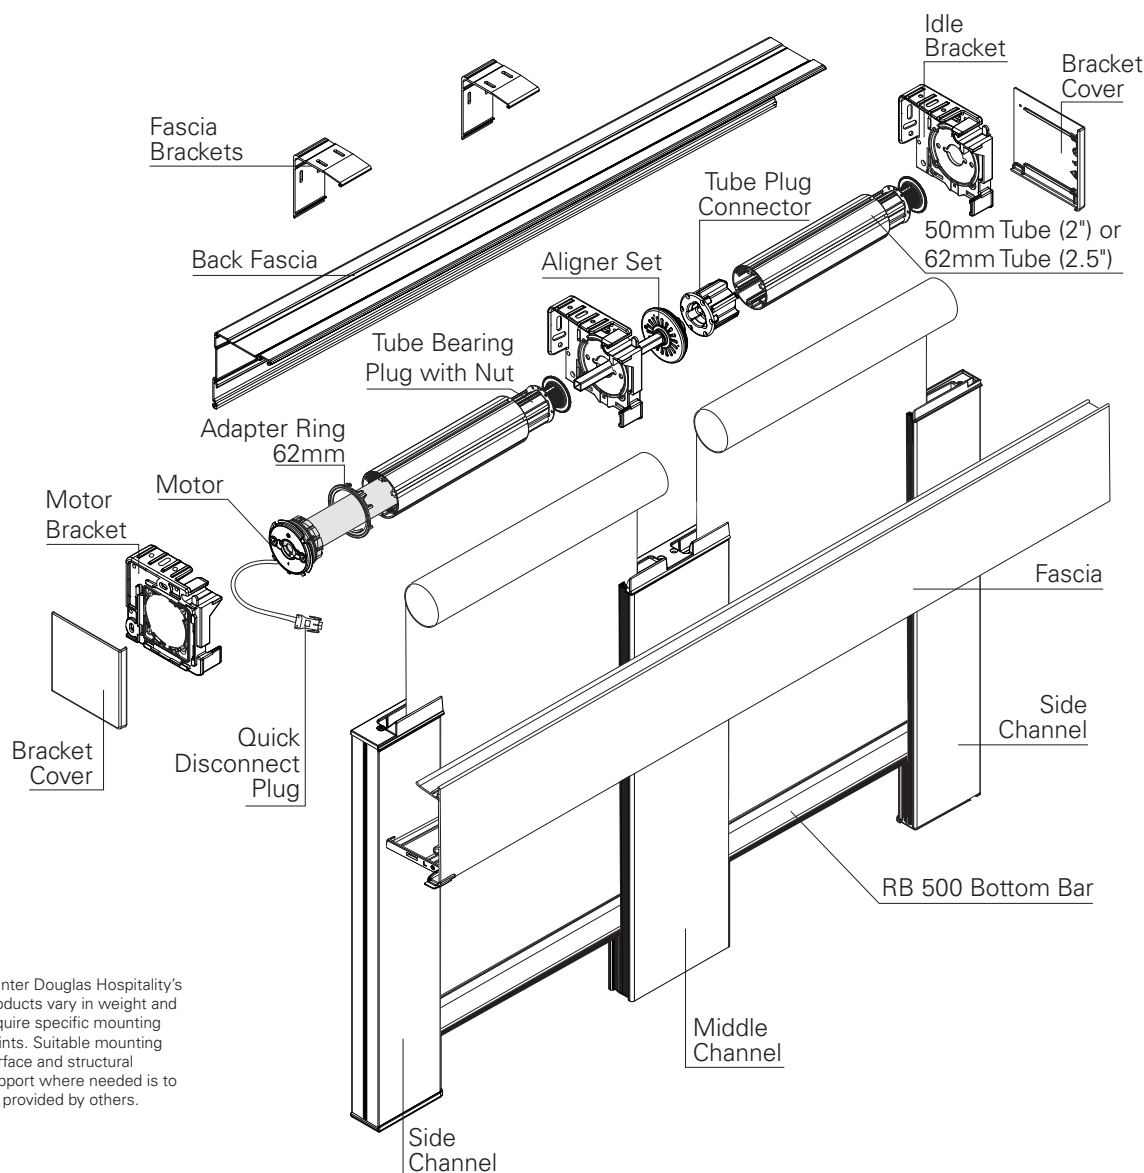


Hunter Douglas Hospitality's products vary in weight and require specific mounting points. Suitable mounting surface and structural support where needed is to be provided by others.


OPTIONS

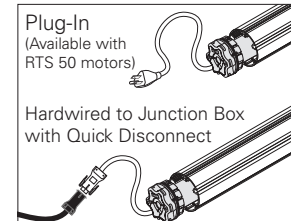

Power Options

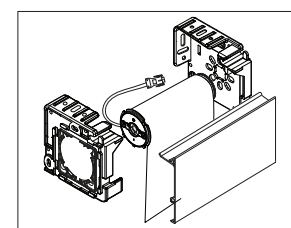

Reverse Roll Fascia



45° Joint

Las Vegas • Chicago
 800.229.5300
 HDhospitality.com

© 2018 Hunter Douglas. All rights reserved. All trademarks used herein are the property of Hunter Douglas or their respective owners.

HunterDouglas
 Hospitality