

RB 500™ 5.25" Pocket Single Shade - Sonesse 30 WireFree RTS Motor

Diagram

Series 5-216

SPECIFICATIONS

Mount: **Surface or Ceiling Mount**

Shade Width: **37mm (1.5") Tube — 30" - 80"**

Shade Width: **50mm (2") Tube — 30" - 120"**

Light Gap: **Motor End — 3/4" (.75")**

Idle End — 3/4" (.75")

Motor connection: **Built-in Rechargeable Battery**

Power connector: **10" Motor Charging Cable Plug**

Bracket Color: **Grey or White**

Bracket Covers: **Grey or White**

Hembar: **Shade fabric determines which hembar is available**


Control Options: **Wireless Wall Switch, Wireless Remote,**

Universal Interface, Timer, Sun Sensor

mylink™ RTS Smartphone, Tablet

and Amazon Alexa Interface

Bracket	Dimensions	Max Roll Up
Bracket 38	1.96"H x 1.22"W x 2.44"D	2-1/2" (2.5")
Bracket 46	1.96"H x 1.22"W x 2.79"D	3-1/8" (3.125")
Bracket 55	1.96"H x 1.22"W x 3.14"D	3-7/8" (3.875")



POCKET COLORS




White




Aluminum


OPTIONS

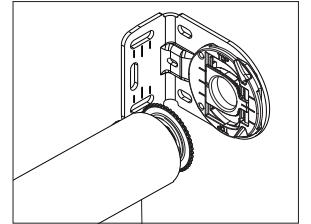

Integrated Leveler

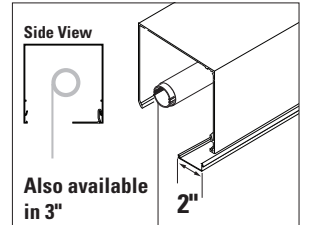


Bottom Closures

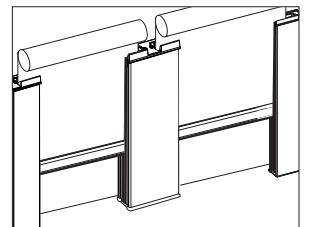

Side and Middle Channels

Plug-In Charger

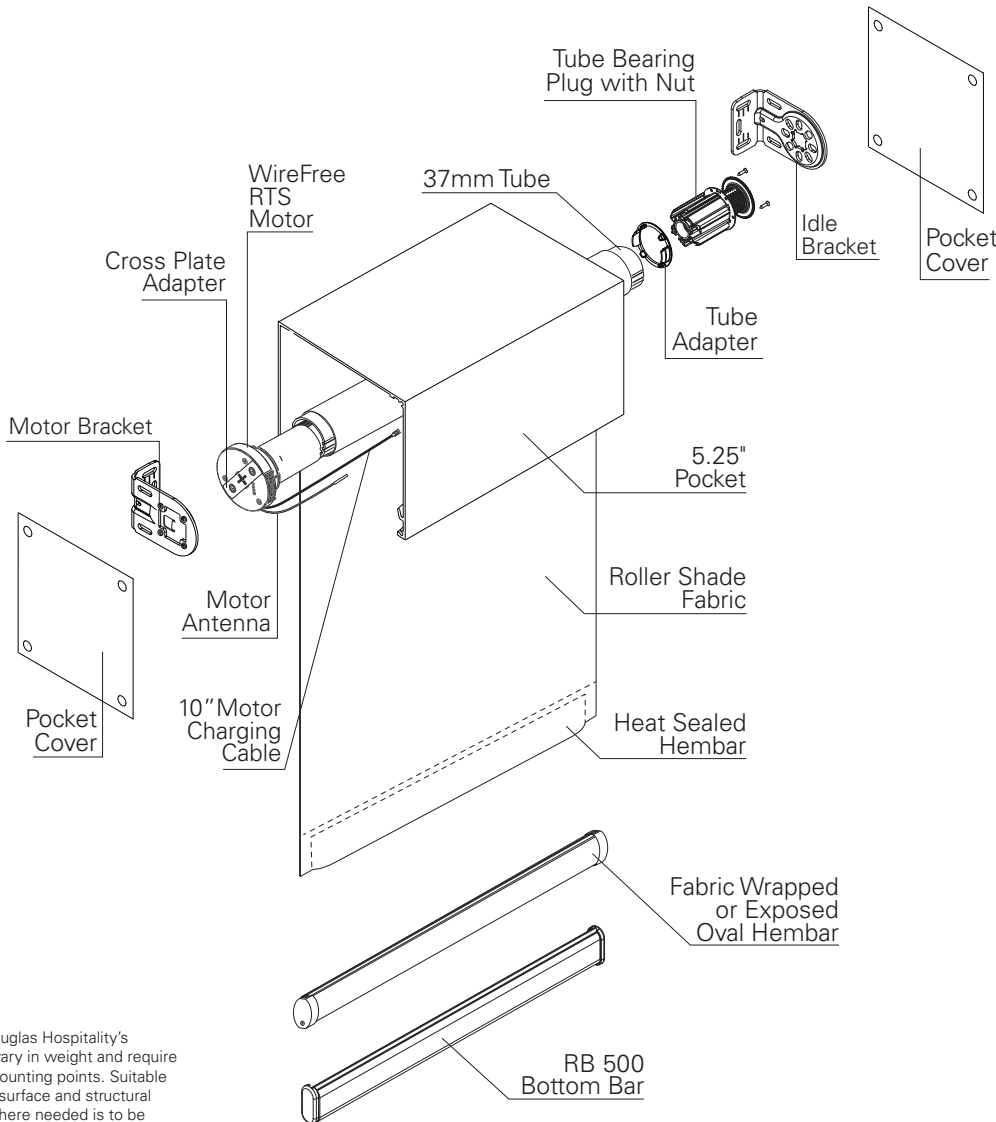

Hunter Douglas Hospitality's products vary in weight and require specific mounting points. Suitable mounting surface and structural support where needed is to be provided by others.

Las Vegas • Chicago

800.229.5300

HDhospitality.com

© 2018 Hunter Douglas. All rights reserved. All trademarks used herein are the property of Hunter Douglas or their respective owners.

HunterDouglas
Hospitality