

RB 500™ Heavy Duty Bracket Coupled - Sonesse 40 & Sonesse 50 RTS Motors



Diagram

SPECIFICATIONS


Mount: **Ceiling, Wall, or End Mount**
 Tube Size: **50mm (2") and 62mm (2.5")**
 Minimum Shade Width RTS 40: **28"**
 Minimum Shade Width RTS 50: **35"**
 Light Gap: **Clutch End – 1"**
 Middle – 1-1/2" (1.5")
 Idle End – 7/8" (.875")

Bracket Color: **Grey**
 Bracket Cover Colors: **Black, Grey, & White**
 Control Options:
Wireless Wall Switch, Wireless Remote, Universal Interface, Timer, Sun Sensor, mylink™ RTS Smartphone, Tablet, and Amazon Alexa Interface


Bracket	Dimensions	Max Roll Up
Bracket 55L	3.46" H x 2.56" W x 3.9" D	3.8"
Bracket 75L	3.46" H x 2.56" W x 4.69" D	5.4"

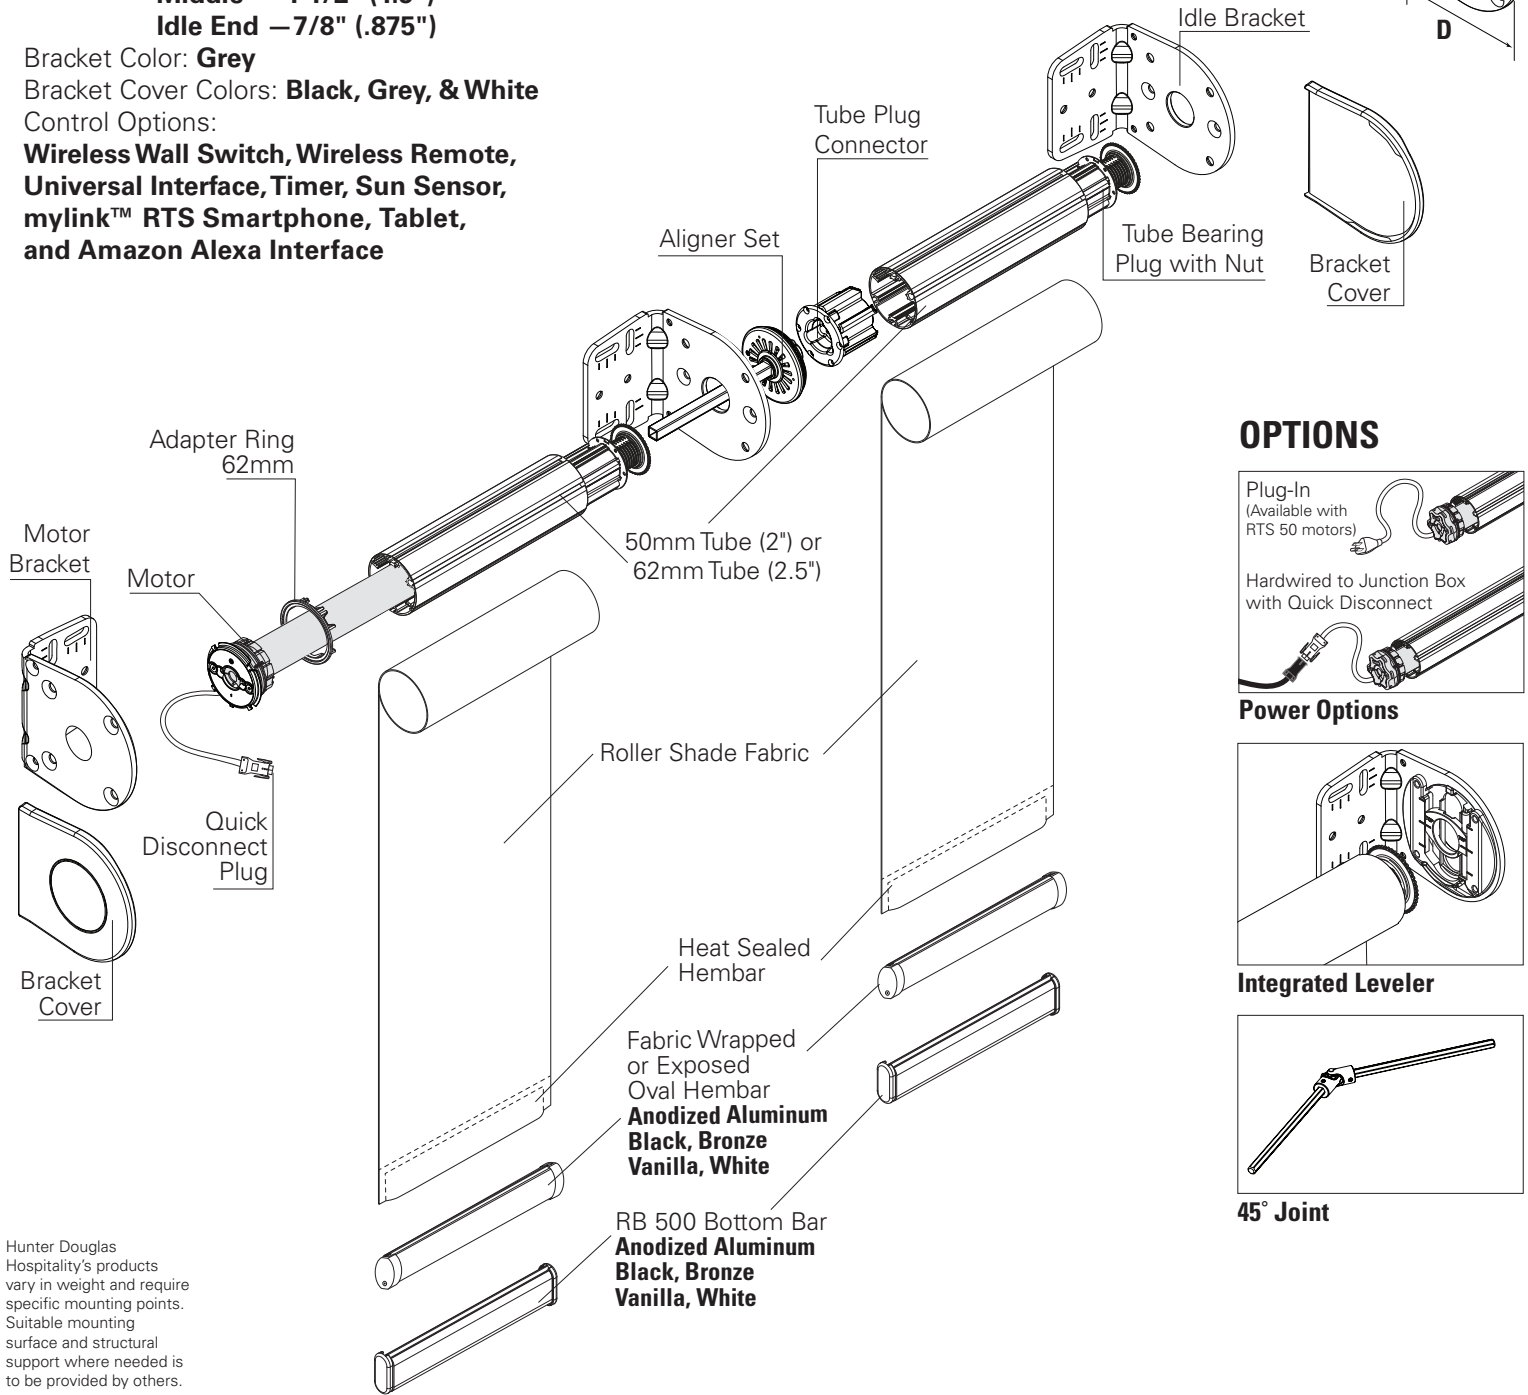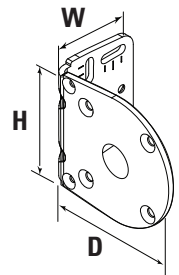


OPTIONS

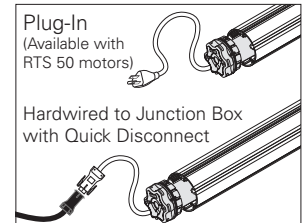

Power Options

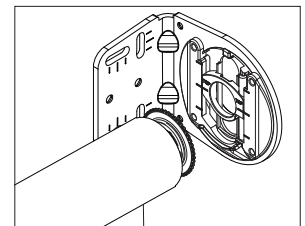

Integrated Leveler



45° Joint

Hunter Douglas Hospitality's products vary in weight and require specific mounting points. Suitable mounting surface and structural support where needed is to be provided by others.

Las Vegas • Chicago
 800.229.5300
 HDhospitality.com

© 2018 Hunter Douglas. All rights reserved. All trademarks used herein are the property of Hunter Douglas or their respective owners.