


Shutters FR - Bi-Fold Panels

Diagram


P2-LL Two left bi-fold, two, three, or four sided frame

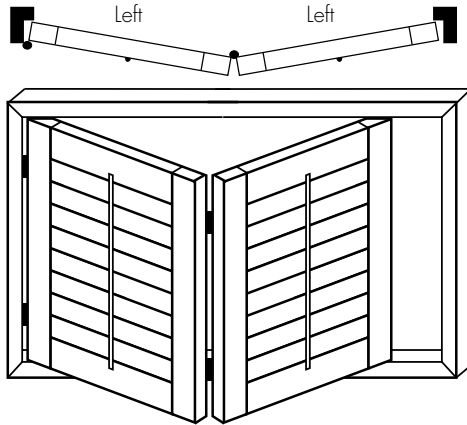

	2 1/2"	3 1/2"	4 1/2"
• Minimum Width:	20"	20"	20"
• Maximum Width:	48"	48"	48"
• Minimum Height:	16"	16"	16"
• Maximum Height:	120"	120"	120"

Note: Panels less than 18" in height are not recommended, due to the excessive louver overlap that may occur.

P2DH-LL Double Hung, two, three, or four sided frame

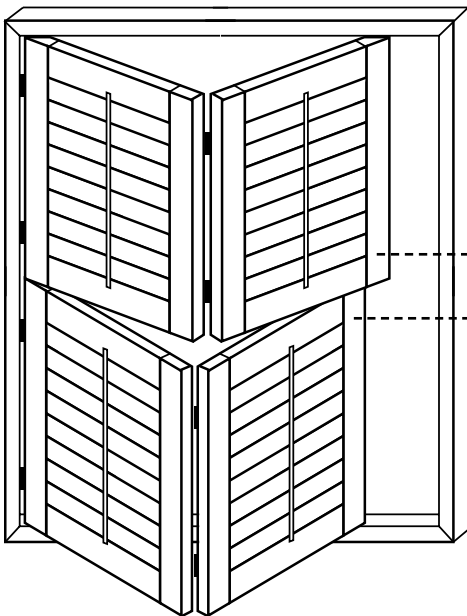

	2 1/2"	3 1/2"	4 1/2"
• Minimum Width:	20"	20"	20"
• Maximum Width:	40"	40"	40"
• Minimum Height:	32"	32"	32"
• Maximum Height:	120"	120"	120"

Optional Horizontal T-Post.


Note: Double Hung styles have a possible 4 5/8" - 6" of obstructed view where bottom rail meets top rail, depending on rail and horizontal T-Post selections.

Note: A Double Hung (DH) panel is considered 2 panels for pricing purposes.


Shutters FR - Bi-Fold Panels

Diagram


P2BF-2L

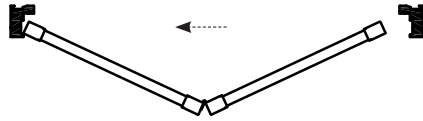

P2BF-2R

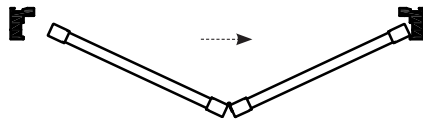


- Minimum Width: 24"
- Maximum Width: 48"
- Minimum Height: 20"
- Maximum Height: 120"

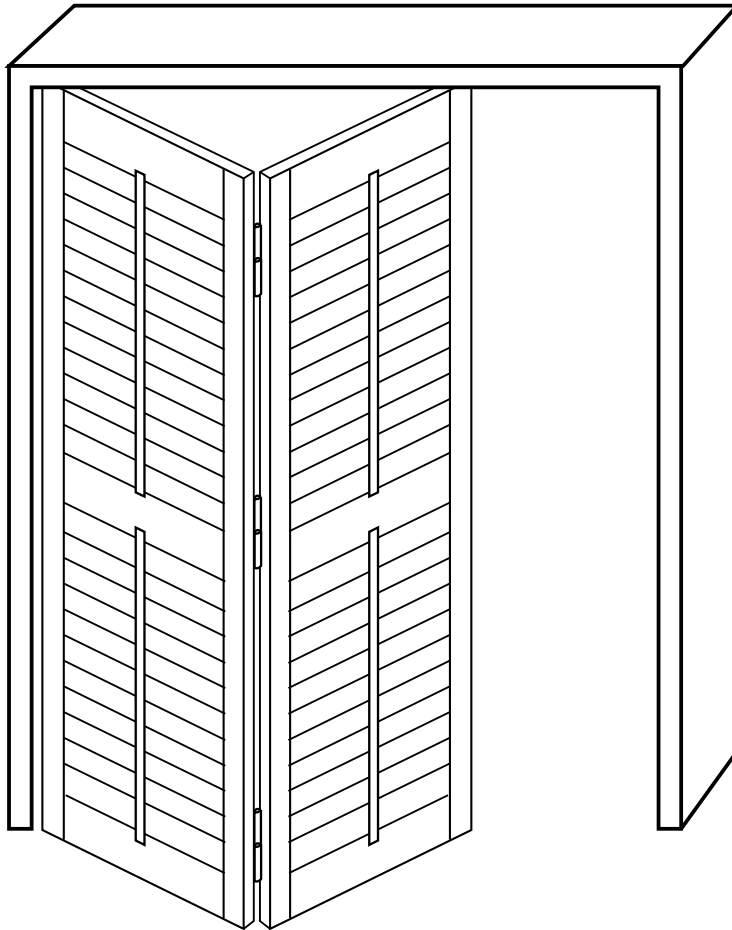


Shutters FR - Bi-Fold Track

Diagram

Standard Valance

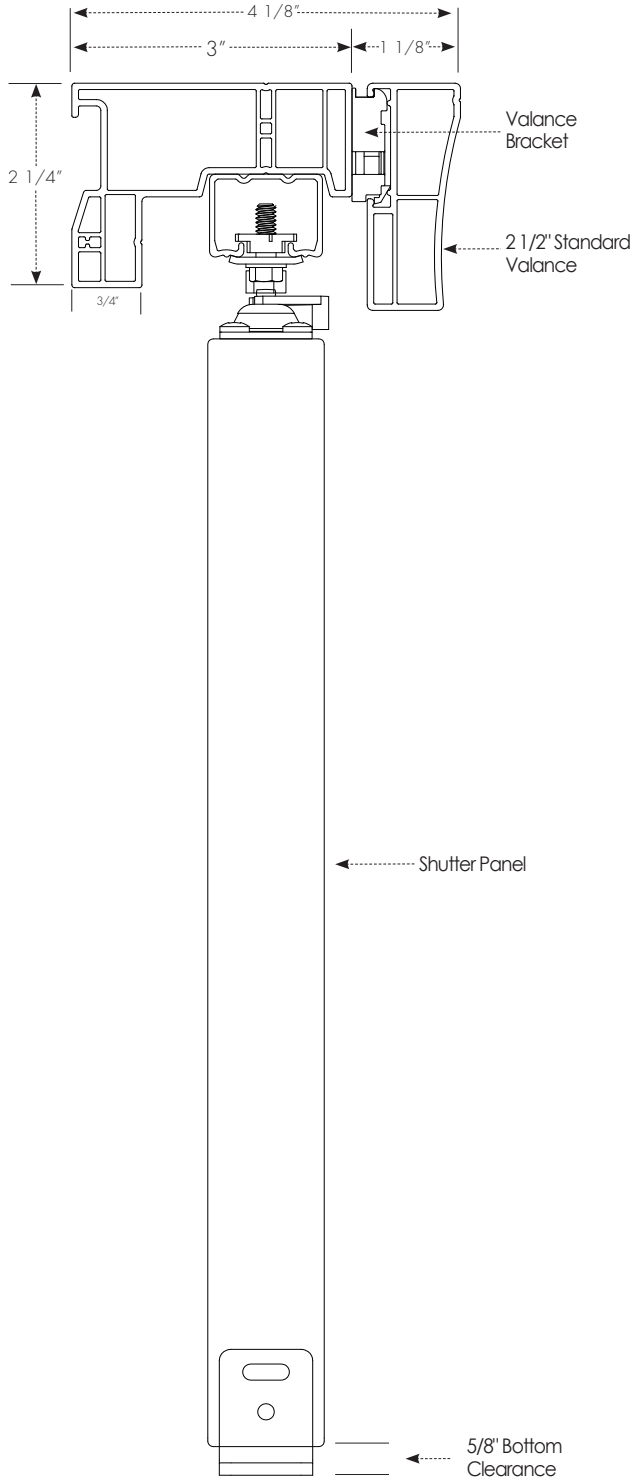

Crown Valance

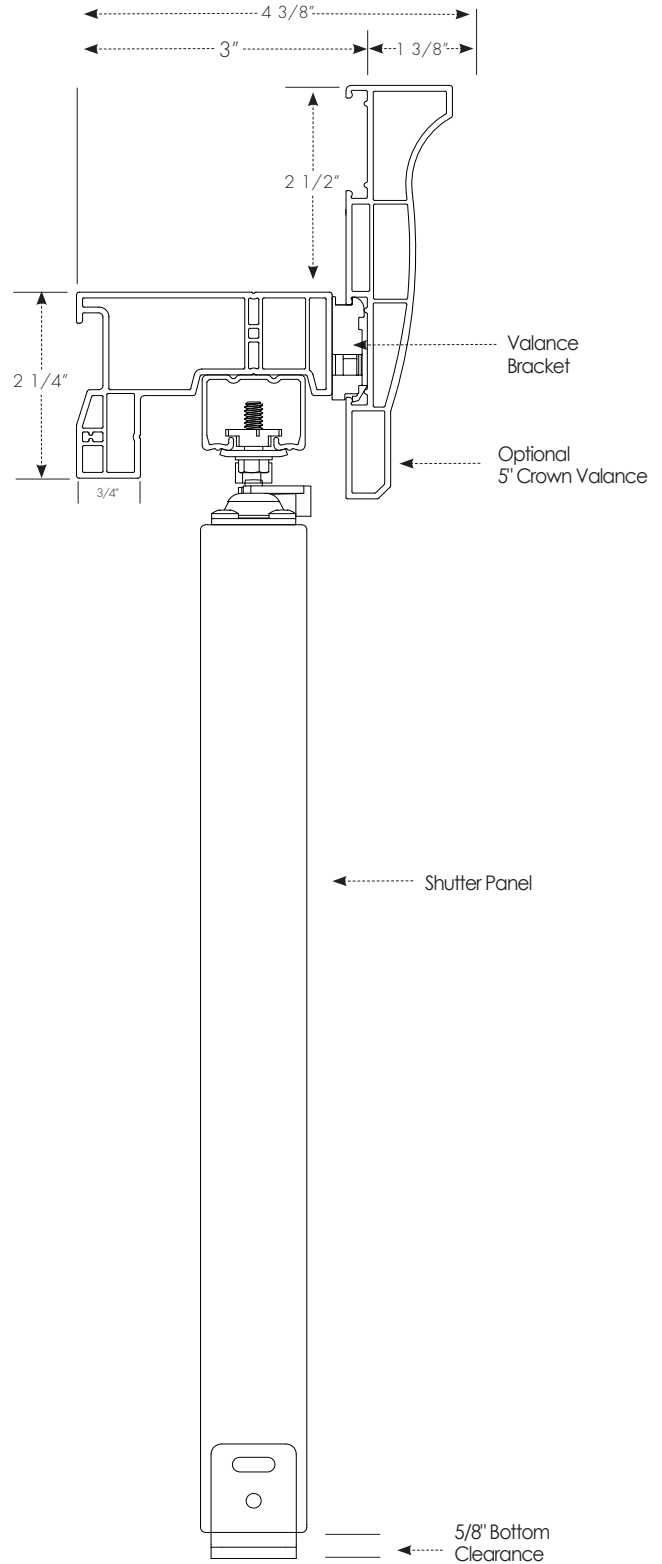

Shutters FR - Bi-Fold Clearance Chart

Diagram

