

RB 500™ Single Bracket - Sonesse 30 WireFree RTS Motor

Diagram

Series 5-216



SPECIFICATIONS

Mount: **Ceiling, Wall, or End Mount**
 Shade Width: **37mm (1.5") Tube — 30" - 80"**
 Light Gap: **Motor End — 3/4" (.75")**
Idle End — 3/4" (.75")

Motor connection: **Built-in Rechargeable Battery**
 Power connector: **10" Motor Charging Cable Plug**
 Bracket Color: **Grey**

Bracket Cover Colors: **Black, Grey, & White**
 Control Options: **Wireless Wall Switch, Wireless Remote, Universal Interface, Timer, Sun Sensor, mylink™ RTS Smartphone, Tablet, and Amazon Alexa Interface**

Bracket	Dimensions	Max Roll Up
Bracket 38	1.96" H x 1.22" W x 2.44" D	2-1/2" (2.5")
Bracket 46	1.96" H x 1.22" W x 2.79" D	3-1/8" (3.125")
Bracket 55	1.96" H x 1.22" W x 3.14" D	3-7/8" (3.875")

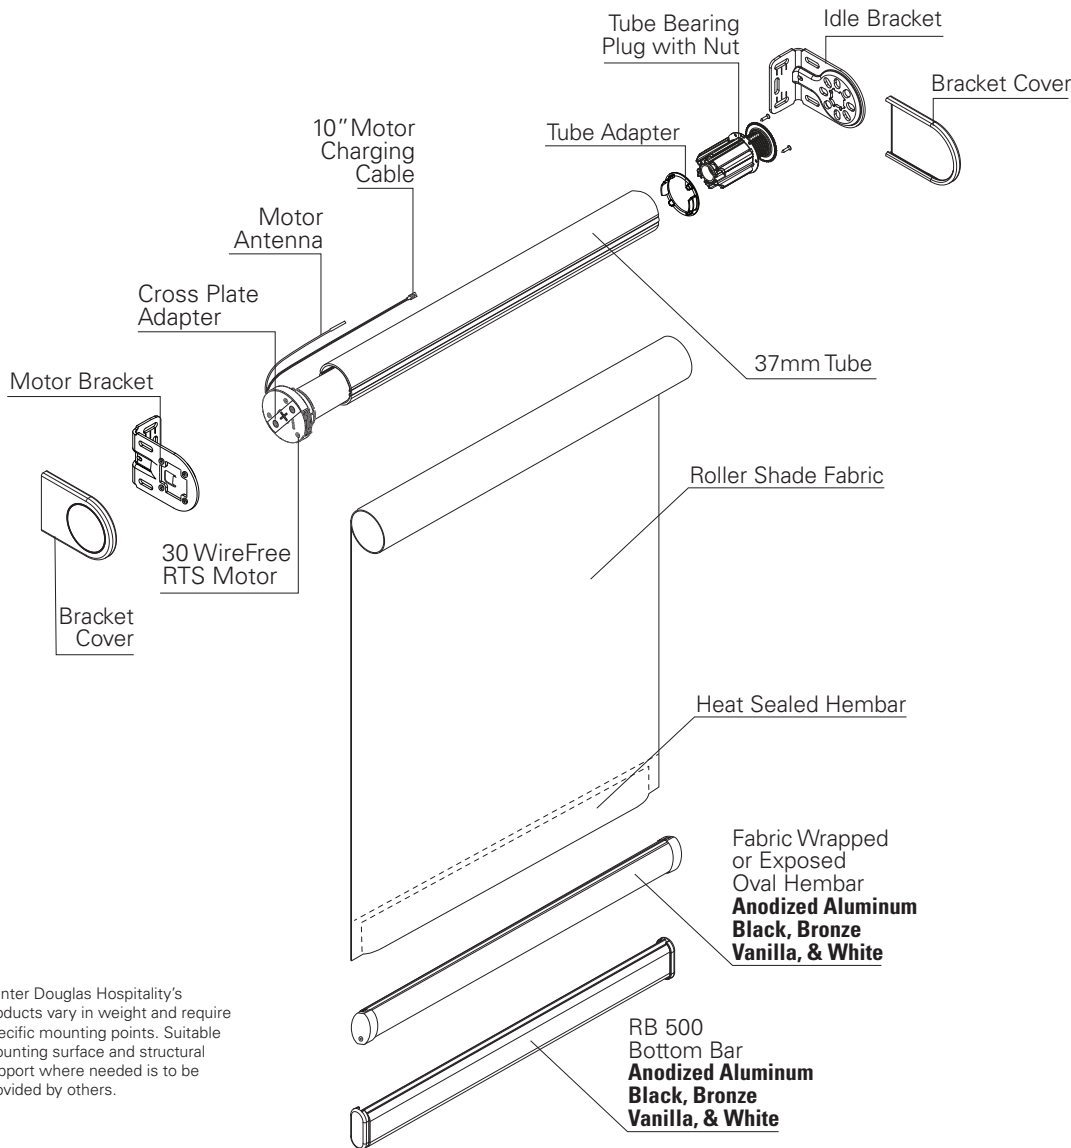


Hunter Douglas Hospitality's products vary in weight and require specific mounting points. Suitable mounting surface and structural support where needed is to be provided by others.


Las Vegas • Chicago
 800.229.5300
 HDhospitality.com

© 2018 Hunter Douglas. All rights reserved. All trademarks used herein are the property of Hunter Douglas or their respective owners.

OPTIONS



Integrated Leveler



Side Channels

Plug-In Charger

